

scan[®] pack

StrapPack

AUTOMATIC STRAPPING MACHINE RQ-8

RQ-8



FULLY AUTOMATIC
STRAPPING MACHINE
RQ-8AP/3



FULLY AUTOMATED
BELT-DRIVEN MODEL
RQ-8A



AUTOMATIC
STRAPPING MACHINE
RQ-8Y

AUTOMATIC STRAPPING MACHINE

❑ SELF-CORRECTING

Unique self-correction mechanisms are adopted for easy operation. Empty strap loops are automatically cast off if the operator straps without a package. The „Re-feed function” resets the machine to allow for continued operation if a strapforwarding failure were ever to occur.

❑ EASY STRAP LOADING

Newly developed loading system free of complicated devices makes strap threading almost completely auto-matic - It's just a touch of a lever.

❑ PERMANENTLY LUBRICATED MECHANISMS

Strapack's self-lubricating design has an unsurpassed reputation for its durability and maintenance-free operation.

❑ AMAZING STRAPPING SPEED

1,5 seconds per strapping cycle - That's 40 per minute!

❑ SELF DIAGNOSTIC

A programmable microprocessor constantly monitors critical functions. Any irregularity sensed is immediately displayed. The machine will even automatically strap coil is empty.

❑ DEPENDABLE

Strapack's advanced bandway design assures perfect strap placement and eliminates any twisted straps.

❑ PORTABLE

Heavy duty metal casters allow for the machine to be quickly installed or moved to any Single Phase power supply outlet.

❑ QUICK HEATER

Ready to operate in less than 25 seconds. Designed to insure high joint strength.

❑ VARIABLE TENSION

A wide range of tension is available to the operator by the use of a single tension dial.

❑ STANDARD SPECIFICATIONS


DIMENSIONS	Width	Height	depth	Weight
	1252 mm	1403 mm	609 mm	160 kg
TABLE HEIGHT	794 mm			
ARCH SIZE	W650 x 500H			
PACKAGE SIZE	Max	W620 x H480 mm		
	Min	W80 x H30 mm		
JOINT / STRAP / COIL	heat seal / polypropylene / ID200 / OD450 / W200 mm			
STRAP WIDTH	5, 6, 9, 12, 15,5 mm			
STRAP TENSION	up to 80 kg stroke 150 mm			
SPEED	1,5 sec/strap, 40 straps per min.			
POWER SUPPLY	110, 120, 200, 220, 230, 240V 1 phase 50/60 Hz 0,65 KVA			

❑ ARCH SIZE CHART

Size in mm Ⓢ standard size

H \ W	650	850	1050	1250	1450
400					
500	Ⓢ				
600					
800					
1000					

Availability of arch sizes is subject to a selection of strap width to be used.

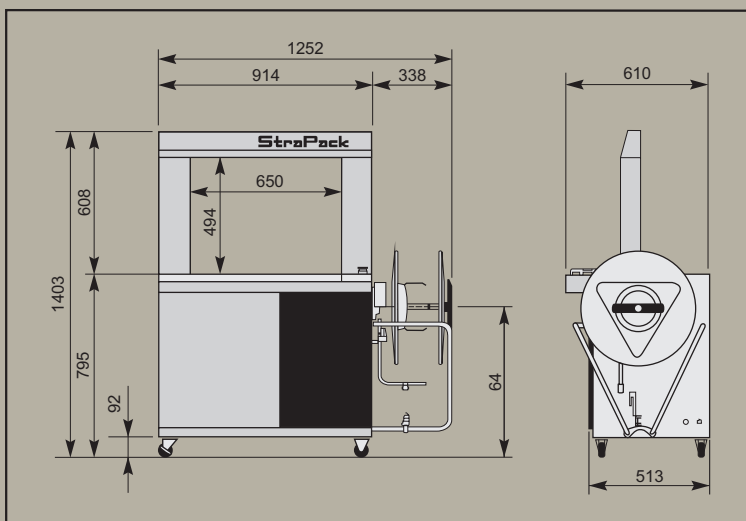

DISTRIBUTED BY:

scanpack®

SCANPACK Sp.J.

60-175 Poznań, ul. Żonkilkowa 14 • Tel/fax: 061 867 82 81 • Tel: 061 867 73 92
63-500 Ostrzeszów • ul. Św. Mikołaja 25 E • Tel: 062 586 01 10 • Fax: 062 586 01 11

E-mail: poznan@scanpack.pl • ostrzeszow@scanpack.pl

Internet: www.scanpack.pl • www.zgrzewarki.pl • www.tasma.com.pl

Modification right reserved. Pats, U.M. & design registered and/ or pending.



STRAPACK CORPORATION
Tokyo, JAPAN